Specifications



## Protection and control relay, PowerLogic P7, generator standard, 11CT, 7VT, 24BI, 20BO, 24-34V, ethernet RJ45

REL73506

#### EAN Code: 3606486926659

#### Main

Wall	
Range of product	PowerLogic P7
Product or component type	Protection and control relay
Relay application	Generator application and bay control
product reference	P7
Mounting case size	40TE
Device mounting	Flush
Mounting support	19" rack
Mounting mode	Flush mounting Rack-mounted
power supply	2434 V DC
measuring inputs	10 CT 1/5 A 1 CT 1 A 7 VT
number of Digital Inputs (DI)	24
number of analogue inputs	8 RTD optional
number of Digital Outputs (DO)	20 1 watchdog
type of temperature module connection	2 twisted, type A, shielded wires (RS485)
communication ports	1 CAN port 1 Ethernet TCP/IP 2 SFP ports 1 USB port 1 COM serial link
communication protocols	Modbus serial and TCP DNP3 serial and TCP IEC 61850 Ed 2.1 IEC 61869-9 IEC 61850-9-2 LE
Redundancy communication port protocol	HSR PRP RSTP Failover

Cuborscourity	
Cybersecurity	IEC 62443 SL2
	LDAP
	RADIUS based user authentication
	Port hardening
	•
	Role-based access control
	Secure boot
	Security log
	Syslog protocol support
	Secured communication with assciated tools
	Password protection
	Firmware signature
	Client IP address filter
	Pre-login banner
	Security policy management
	Security policy management
protection functions	Phase overcurrent 50/51
	Ground fault protection 50N/51N
	Sensitive earth fault overcurrent 50G/51G
	Negative sequence overcurrent 46
	Inrush detection 68
	Phase undercurrent 37
	Undervoltage 27
	Overvoltage 59
	Positive sequence undervoltage 47
	Overfrequency 810
	Underfrequency 81U
	High impedance differential 64REF
	Motor differential 87M
	Thermal overload for machines 49
	Temperature monitoring (8 or 16 RTDs) 38/49T
	Startup motoring 48
	Locked rotor 51LR
	Motor restart inhibition 66
	Voltage check 47
	Overspeed 12
	Underspeed (2 set points) 14
	Field loss (underimpedance) 40
	Underimpedance 21
	Out of step 78PS
	CT supervision 60
	VT supervision 60FL
	•
	Breaker failure 50 BF
	Programmable logic
measurement functions	Current 3-phase
measurement functions	
measurement functions	DMC ourrent 2 phone
measurement functions	RMS current 3-phase
measurement functions	RMS current 3-phase Current sequence
measurement functions	Current sequence
measurement functions	Current sequence Current 1-phase
measurement functions	Current sequence Current 1-phase RMS current 1-phase
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase
measurement functions	Current sequence Current 1-phase RMS current 1-phase
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power sequence Power factor 1-phase Active power fundamental frequency
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase Voltage 3-phase Voltage 3-phase Voltage 1-phase Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage 3-phase Voltage 1-phase Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase Voltage 3-phase Voltage 3-phase Voltage 1-phase Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS apparent power RMS apparent power
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS apparent power RMS apparent power RMS apparent power Active power demand maximum Active power demand minimum
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS apparent power RMS apparent power
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS apparent power RMS apparent power RMS apparent power Active power demand maximum Active power demand minimum
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS apparent power Active power dundamental frequency RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase Voltage 3-phase Voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS apparent power Active power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum Reactive power demand maximum
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS apparent power Active power dundamental frequency RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase Voltage 3-phase Voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS apparent power Active power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum Reactive power demand maximum
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency RMS active power fundamental frequency RMS active power fundamental frequency RMS reactive power fundamental frequency RMS reactive power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand minimum Reactive power demand minimum Apparent power demand maximum Apparent power demand minimum Apparent power demand minimum Apparent power demand minimum Apparent power demand minimum RMS phase current demand maximum
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency RMS active power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum Apparent power demand maximum RMS phase current demand maximum
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency RMS active power fundamental frequency RMS active power fundamental frequency RMS reactive power fundamental frequency RMS reactive power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand minimum Reactive power demand minimum Apparent power demand maximum Apparent power demand minimum Apparent power demand minimum Apparent power demand minimum Apparent power demand minimum RMS phase current demand maximum
	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency RMS active power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum Apparent power demand maximum RMS phase current demand maximum
	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency RMS active power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum Apparent power demand maximum RMS phase current demand maximum
	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage 3-phase Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power fundamental frequency RMS apparent power RMS apparent power RMS apparent power RMS apparent power RMS apparent power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum Apparent power demand maximum Apparent power demand minimum RMS phase current demand maximum RMS phase current demand minimum Earth fault current external measurement Switchgear control and monitoring
	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage 3-phase Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power fundamental frequency RMS active power fundamental frequency RMS active power fundamental frequency RMS apparent power RMS apparent power RMS apparent power Active power demand maximum Active power demand maximum Apparent power demand maximum Apparent power demand maximum Apparent power demand maximum Apparent power demand maximum RMS phase current demand maximum RMS phase current demand maximum RMS phase current demand minimum Earth fault current external measurement Switchgear control and monitoring Programmable switchgear interlocking
	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage 3-phase Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power fundamental frequency RMS apparent power RMS apparent power RMS apparent power RMS apparent power RMS apparent power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum Apparent power demand maximum Apparent power demand minimum RMS phase current demand maximum RMS phase current demand minimum Earth fault current external measurement Switchgear control and monitoring
measurement functions	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage 3-phase Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power fundamental frequency RMS active power fundamental frequency RMS active power fundamental frequency RMS apparent power RMS apparent power RMS apparent power Active power demand maximum Active power demand maximum Apparent power demand maximum Apparent power demand maximum Apparent power demand maximum Apparent power demand maximum RMS phase current demand maximum RMS phase current demand maximum RMS phase current demand minimum Earth fault current external measurement Switchgear control and monitoring Programmable switchgear interlocking
	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS active power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum Apparent power demand maximum Switchgear control and monitoring Programmable switchgear interlocking Local/remote control Programmable logic
	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage 3-phase Voltage 1-phase RMS voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency RMS active power fundamental frequency RMS active power fundamental frequency RMS apparent power RMS apparent power RMS apparent power Active power demand maximum Active power demand minimum Reactive power demand maximum Reactive power demand minimum Apparent power demand maximum Apparent power demand minimum Reactive power demand minimum RMS phase current demand maximum RMS phase current demand minimum RMS phase current
	Current sequence Current 1-phase RMS current 1-phase Voltage 3-phase RMS voltage 3-phase Voltage sequence Voltage 1-phase RMS voltage 1-phase Power sequence Power factor 1-phase Active power fundamental frequency Apparent power fundamental frequency Reactive power fundamental frequency RMS active power fundamental frequency RMS reactive power RMS active power RMS apparent power Active power demand maximum Active power demand maximum Reactive power demand maximum Apparent power demand maximum Switchgear control and monitoring Programmable switchgear interlocking Local/remote control Programmable logic

controllable switchgear devices	10 controlled objects	
number of setting groups	8	
monitoring functions	Circuit breaker monitoring Switch monitoring Relay self-monitoring Trip circuit supervision 74 Event counters Watchdog	
logs and records	Disturbance recording Event recording Fault recording Operation log	
Switchgear diagnosis type	CT/VT supervision ANSI code: 60 Auxiliary power supply monitoring Cumulative breaking current Number of operations DC battery voltage monitoring	
Connections - terminals	Screw type terminals (digital input/output) Ring terminal (analogue input)	

# Complementary

50 ms	
24 W typical	
24 V DC	
IRIG-B SNTP	
IEEE 1588	
PowerLogic Engineering Suite	
Colour touchscreen 800 x 640 pixels	
7 inch	
Single line diagram	
Menu-driven user interface	
1 home physical key	
1 reset physical key	
12 customizable virtual function keys	
4 LEDs red/orange device status	
24 LEDs tri-colour programmable	
DNP3	
Modbus	
IEC 61850 Ed 2.1	
Connection to a PC USB	
Extension port extension cable	
Ethernet port RJ45	
Serial port RS485 cable	
SFP redundant Ethernet port fibre optic/RJ45 multi/single mode optional	
cUL listed	
UKCA	
KETOP	
CE	
DNV	
178 mm	
205.2 mm	
282 mm	
8.8 kg maximum	

Life Is On Schneider

### Environment

climatic withstand	Exposure to cold Ae conforming to IEC 60068-2-1 Exposure to dry heat Be conforming to IEC 60068-2-2 Exposure to damp heat in service Cab conforming to IEC 60068-2-78 Temperature variation Nb conforming to IEC 60068-2-14 Exposure to damp heat not in service Cab conforming to IEC 60068-2-30 Salt mist Kb/1 conforming to IEC 60068-2-52 Influence of corrosion/gas test 2 Ke conforming to IEC 60068-2-60 Influence of corrosion/gas test 4 Ke conforming to IEC 60068-2-60
Mechanical robustness	Vibrations (level: class 2) conforming to IEC 60255-21-1 Shocks (level: class 2) conforming to IEC 60255-21-2 Shocks (level: class 1) conforming to IEC 60255-21-2 Bumps (level: class 1) conforming to IEC 60255-21-2 Seismic tests (level: class 2) conforming to IEC 60255-21-3
Electromagnetic compatibility	Electromagnetic immunity class A conforming to CISPR 11 Electromagnetic immunity class A conforming to CISPR 22 Electromagnetic immunity level 3 conforming to IEC 6100-4-3 Radiated radio-frequency electromagnetic field immunity test conforming to ANSI C37.90.2 Electrostatic discharge level 4 conforming to IEC 6100-4-2 Electrostatic discharge level 3 conforming to ANSI C37.90.3 Immunity to magnetic fields level 4 conforming to IEC 61000-4-8 Immunity to magnetic fields level 5 conforming to IEC 61000-4-9 Immunity to magnetic fields level 5 conforming to IEC 61000-4-9 Immunity to magnetic fields level 3 conforming to IEC 61000-4-10 Conducted RF disturbances level 3 conforming to IEC 61000-4-6 Fast transient bursts level 4 conforming to IEC 61000-4-18 Damped oscillatory wave level 3 conforming to IEC 61000-4-18 Damped oscillatory wave level 3 conforming to IEC 61000-4-12 Conducted disturbance emission A conforming to IEC 61000-4-16 Surges level 4 conforming to IEC 61000-4-16
Ambient air temperature for operation	-4070 °C ( 96 h )
IP degree of protection	IP54 front conforming to IEC 60529 IP30 case conforming to IEC 60529 IP20 rear conforming to IEC 60529
IK degree of protection	IK07 conforming to IEC 62262
maximum operating altitude	2000 m
Protective treatment	Conformal coating conforming to IEC 60068-2-52:Kb/1 Conformal coating conforming to IEC 60068-2-60:Ke

### **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	30 cm
Package 1 Width	30 cm
Package 1 Length	40 cm
Package 1 Weight	9.349 kg


#### **Contractual warranty**

Warranty

Up to 10 years extended warranty (Standard warranty 2 years. Please check with your local SE representative for extended warranty availability and conditions)

# Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

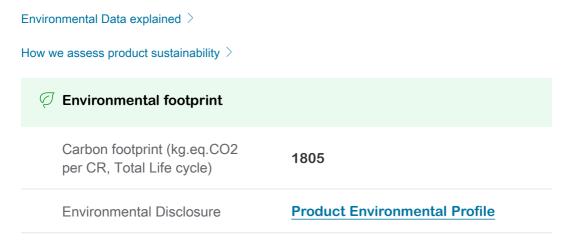

## **Use Better**

S Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Νο
EU RoHS Directive	Compliant with Exemptions
SCIP Number	7185a990- e1e7-4906-8102-573086cf8d7d
REACh Regulation	<b>REACh Declaration</b>
China RoHS Regulation	China RoHS declaration

## **Use Again**

♡ Repack and remanufacture	
Circularity Profile	End of Life Information

Life Is On Schneider

 WEEE
 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

 Take-back
 No

#### **Technical Illustration**

#### Assembly's dimensions

